

Instruction manual

MTB Handlebars: Riser, Flatbar & Special Flatbar 9° with reinforcements for bar ends and screw handles

Important installation instructions:

We congratulate you on your purchase and thank you for your trust in our products. Your new carbon handlebar withstands highest stress and has been made to the latest and most efficient methods of design and manufacture. This includes special features that must be considered for installation.

Please read these instructions carefully and make sure that they are observed.

As a buyer of our carbon products, you are certainly aware of the importance of the careful installation of your new carbon handlebar.

If you feel uncertain about the installation of your new handlebar, please contact us or your nearest dealer presenting these installation instructions.

As a buyer of our carbon products, you are certainly aware of the importance of the careful installation of your new carbon tube.

If you feel uncertain about the installation of your new handlebar, please contact us or your nearest dealer presenting these installation instructions.

Tighten the screws of the stem clamp maximum to **4 Nm**; in most cases 2.5 Nm is sufficient for reliable clamping. Tighten the screws of the braking, shift and other levers only maximum to **2.5 Nm**. If the stem or lever manufacturer recommends higher tightening torques, these normally are for thick-wall aluminum bars and not for your new carbon handlebar.

Tighten the screws of the bar ends maximum to **6 Nm**. Tighten the screws of the grips (if existing) maximum to **6 Nm** (bar end side) and maximum to **2.5 Nm** (brake, shift lever side).

Make absolutely sure to observe the clamping areas in the drawing. The handlebar must not be clamped except inside the marked areas.




The tightening torque of the screws of braking, shift and other levers is maximum 2.5 Nm!

If a different tightening torque is applied you damage your new Mcfk handlebar (even if you will not see the damage directly) and pose an enormous safety risk yourself and for other riders.



All Types of bar-ends are allowed except Extralite „Cyberends“ bar ends. The sharp and thin clamping of these bar ends ruin your new Handlebar and pose an enormous safety risk yourself and for other riders.

Non-compliance with these installation instructions or of the specified maximum tightening torques voids your warranty and any claim under it and exposes you and others to an incalculable risk.

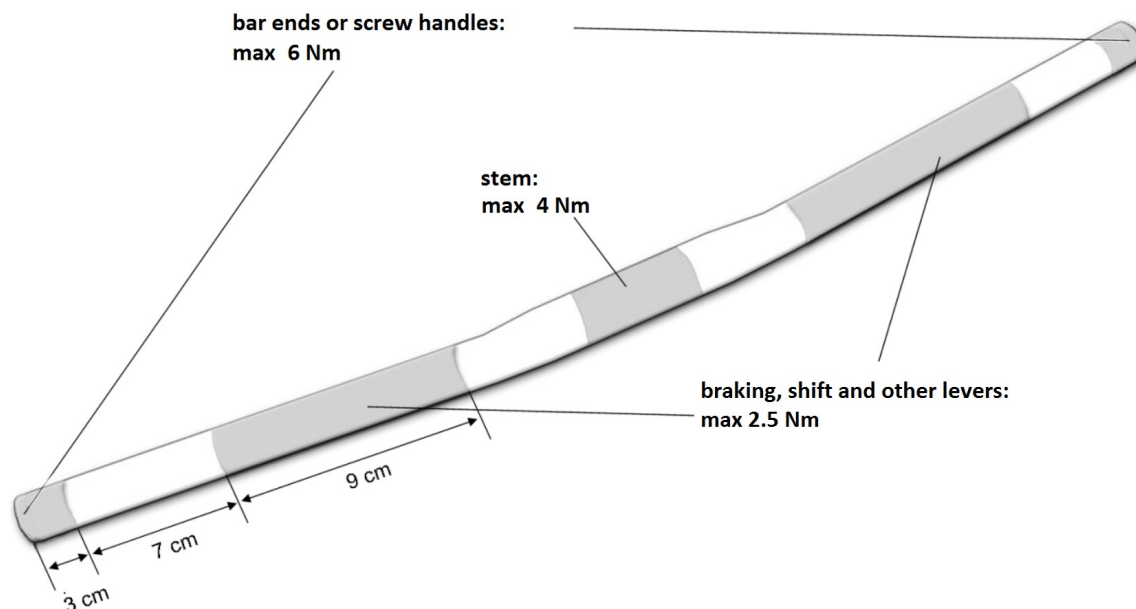

Warranty:

We grant a warranty of two years from the date of purchase of our products. Warranty claims can only be accepted if a (copy of the) dealer invoice is available.

The warranty covers defects of material and workmanship; it does not cover defects due to:
Normal wear and tear
Improper use
Non-compliance with the instructions for use.

Warranty claims must be settled on site and are at the discretion of the firm Mcfk. The warranty granted by the firm Mcfk does not include compensation of damage; particularly any indirect damage in connection with an accident, any other indirect or consequential damage are excluded from our warranty.

The satisfaction of our customers is important to us. For this reason, we usually treat problems with our products very generously, also outside the warranty period. Please clean and return the parts and add a brief written account (including your contact data) and a copy of the invoice of the consignment.